


AD-12

The AD-12 equipment of LDA is a professional distributor of balanced audio. It has got an audio input with 5V manoeuvre, which distributes the audio to 12 output with their own manoeuvre.

This equipment is designed for Public Address System with Auxiliary Emergency System, that gives the required redundancy in the audio transmission way. Furthermore, it allows a secure connection in line allowing the audio transmission to the following equipment – although being the previous equipment turned off.

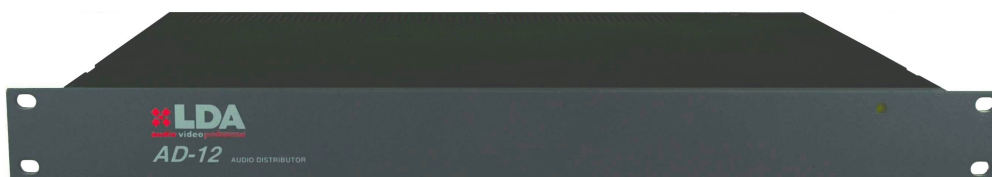

Features:

- Balanced audio Inputs and Outputs
- General gain setting
- Logical Input and Output with regeneration
- Excellent distortion and bandwidth
- Easy installation connectors

TECHNICAL SPECIFICATIONS	
POWER SUPPLY	220-240 50 Hz
CONSUMPTION	< 15 W
FREQUENCY RESPONSE	+/- 0,5 dB (20-20,000 Hz)
SIGNAL/NOISE RATIO	> 100 dB
CONNECTORS	Euroblock type
INPUTS	1
OUTPUTS	12+1
DIMENSIONS (height x width x depth)	44 x 483 x 310 mm. 1 U 19" Rack.