

AT-60 / AT-25 / AT-150

Ref: LDAAT60S02 / LDAAT25S01 / LDAAT150S01

The AT Series is divided into three models that provide from 25W @70V to 50W @100V.

Every model has a bracket that is compatible with the different outer cases.

The model AT-6 can be installed on standard European electrical socket frames. As an accessory for the installation there are two models of wall cases that have one (MC20E03) or two (MC20E04) apertures.



The AT-6 attenuator can be combined with a LDA SE-6 line selector to allow the selection of different programs.

Functional features:

- High impedance line attenuators
- 10 volume steps of 3dB
- Override for priority or emergency input (even at the mute position)
- Bracket compatible with different cases
- Operation input for system's emergency or priority



Technical specifications:

Models	AT-60 / AT-25 / AT150
References	LDAAT60S02 / LDAAT25S01 / LDAAT150S01
Nominal Power (RMS)	AT-6.0: 6W @ 70V ; 12W @ 100V AT-12: 12W @ 70V ; 24W @ 100V AT-25: 25W @ 70V ; 50W @ 100V
Input override	Emergency or priority (24V)
Material	ABS
Bracket	Compatible with other enclosure designs
Dimensions	80.1 x 80.1 x 67,8 mm (H x W x D)
Weight	0,12 kg

Model	Line selector SE-6
Lines	6 PA lines selector
Input override	Emergency or priority (24V)
Color	White (RAL 9003)
Dimensions	80,1 x 80,1 x 54 mm (H x W x D)
Weight	0,12 kg

AT-60 / AT-25 / AT-150

Ref: LDAAT60S02 / LDAAT25S01 / LDAAT150S01

Bracket:



Enclosures:



LDA Enclosure



LS JUNG



SIMON 82




SIMON 75 SERIES

AT-60 / AT-25 / AT-150

Ref: LDAAT60S02 / LDAAT25S01 / LDAAT150S01

Installation:

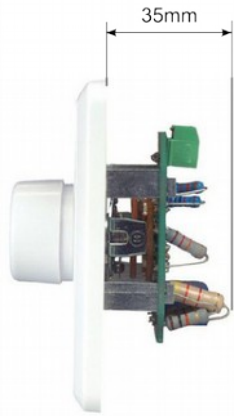

AT-6



AT- Series

Accessories:



Standard
socket



MC20EC04



MC20EC03