

NEO CONTROL

Ref: LDANECTRLSWS01

LDA NEO CONTROL SOFTWARE FOR PAVA SYSTEM MANAGEMENT

This software allows total control and supervision of the entire system through ethernet network, an easy and intuitive installation and with no configuration required.

It allows a centralized control of the system, volume control, source routing, pre-recorded messages broadcasting, management of emergency functions and system profiles. It allows setting installation floor plans as GUI interface. Single-user license.




Main features of NEO CONTROL:

- Central and secure control of the NEO system.
- Routing of quality audio.
- Easy to install and configure.
- Volume control.
- Total system supervision (failure, evac mode, etc) by zones.
- Allows to add installation drawing plans.
- Synchronised with the NEO system.
- Without the need to configure databases.
- Exclusive for NEO systems (NEO 8060 and NEO Extensions units).
- One NEO system can accept up to 5 connections from NEO Control.
- NEO Control allows to control only one NEO 8060 + NEO Extensions system. Multiple NEO cannot be controlled by NEO Control.

NEO CONTROL

Ref: LDANECTRLSWS01

Screenshot:

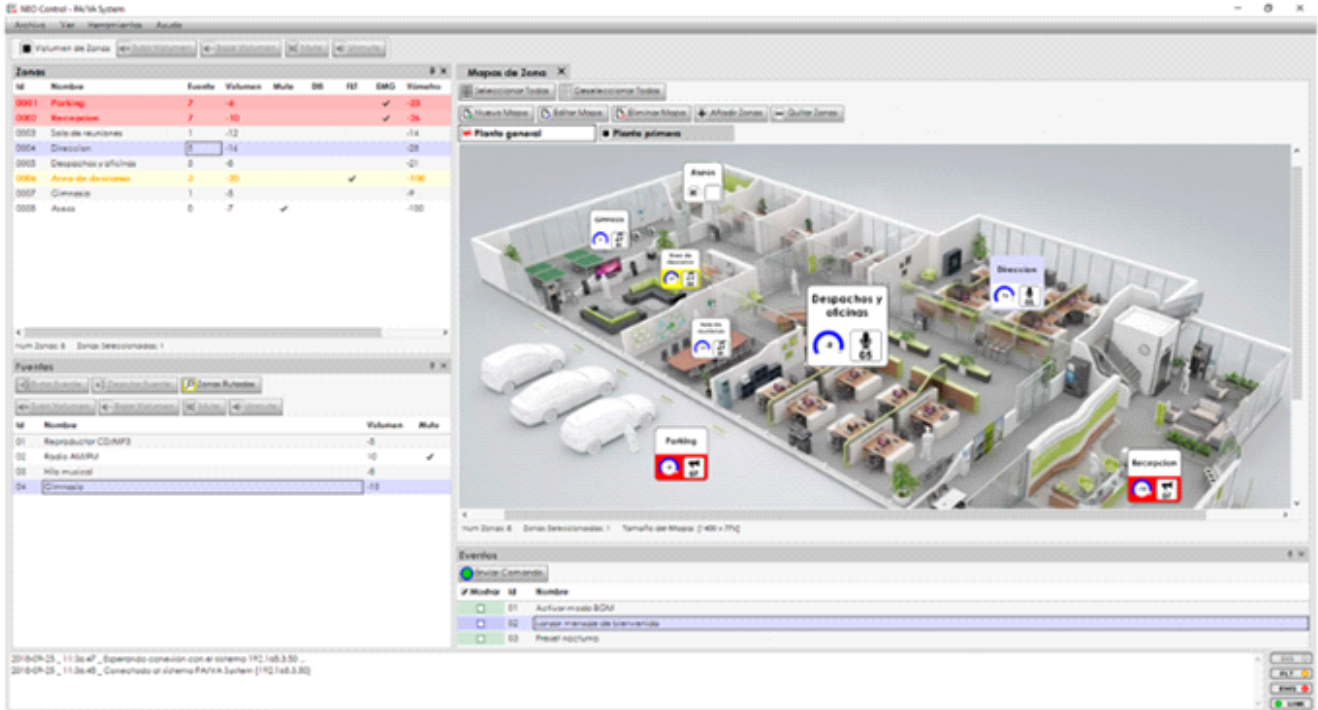

Server's requirements:

Components	Requirements
Processor	Min: 1 GHz. Recommended: 2 GHz Optimal: 3GHz or more.
Memory	Min: 2 Gb RAM. Recommended: 4 Gb RAM. Optimal: 8 Gb RAM
Free memory	Min: 20 Gb. Recommended: 60 Gb. Optimal: 100 Gb.
Multimedia	Sound card.
Screen and others	Super VGA (800x600) or better Keyboard Microsoft mouse or similar
Operating system	Windows 2008/XP/Windows 7 – 64 or 32 bits

NEO CONTROL

Ref: LDANEOCTRLSWS01

Clients's requirements:

- PC/MAC (screen + keyboard + mouse)
- Tablet
- Smartphone

*Google Chrome is recommended.